




**PREFERRED
POWER
PRODUCTS**

PRODUCT SPECIFICATION

DESCRIPTION



The P3TV248UL is a CCTV power supply and distribution module. It is designed with 4 individually fused outputs for powering CCTV cameras and accessories. It will provide 24VAC via distribution to 8 fused outputs with a total of 4.0 Amps continuous supply current.

FEATURES

-  Listed (UL 2044)
- Input 115VAC 50/60 HZ 0.9 Amps
- 4 Amps 100VA supply current
- Eight 24VAC individually fused outputs
- Output fuses are rated at 3 Amps
- Main fuse is rated at 5 Amps
- Surge protected outputs
- AC power LED indicator
- Individual LED's for each output
- Power ON/OFF switch
- Spare fuses included
- Unit maintains camera synchronization
- Ease of installation saves time and eliminates costly labor

INSTALLATION INSTRUCTIONS


- Mount the P3TV248UL in desired location and secure
- Slide switch to OFF position
- Connect the AC 115VAC 50/60Hz to the black and white flying leads of the transformer
- Connect the green to an earth ground
- Connect each camera to terminals 1 to 8 marked 1 to 8 (+ & -)
- Slide switch to ON position
- Green LED will illuminate when AC power is present
- Red individual LED's will light when cameras or accessories are present and powered
- Upon completion of wiring secure enclosure door with catch.

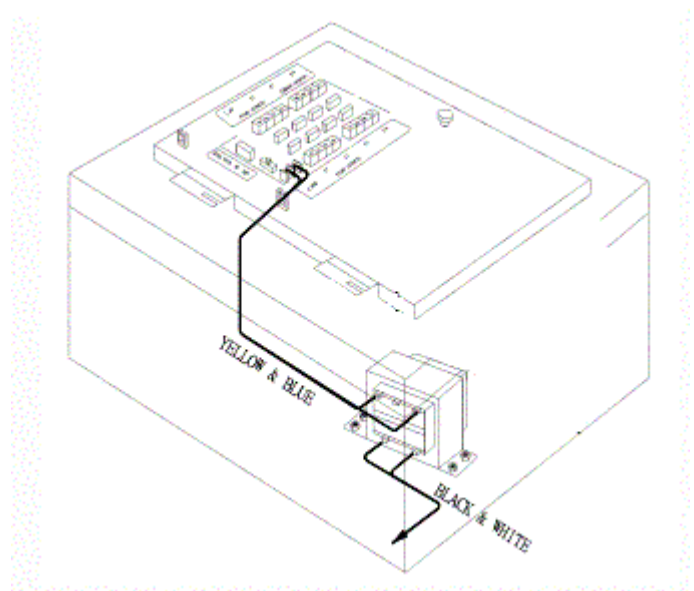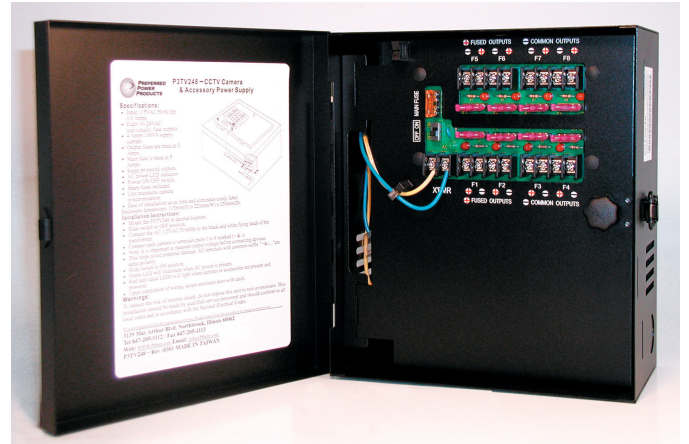

WARNINGS

**To reduce the risk of electric shock, do not expose this product to rain or moisture
For continuous protection against hazard, replace only with same type and rating of fuse**

Enclosure Dimensions:

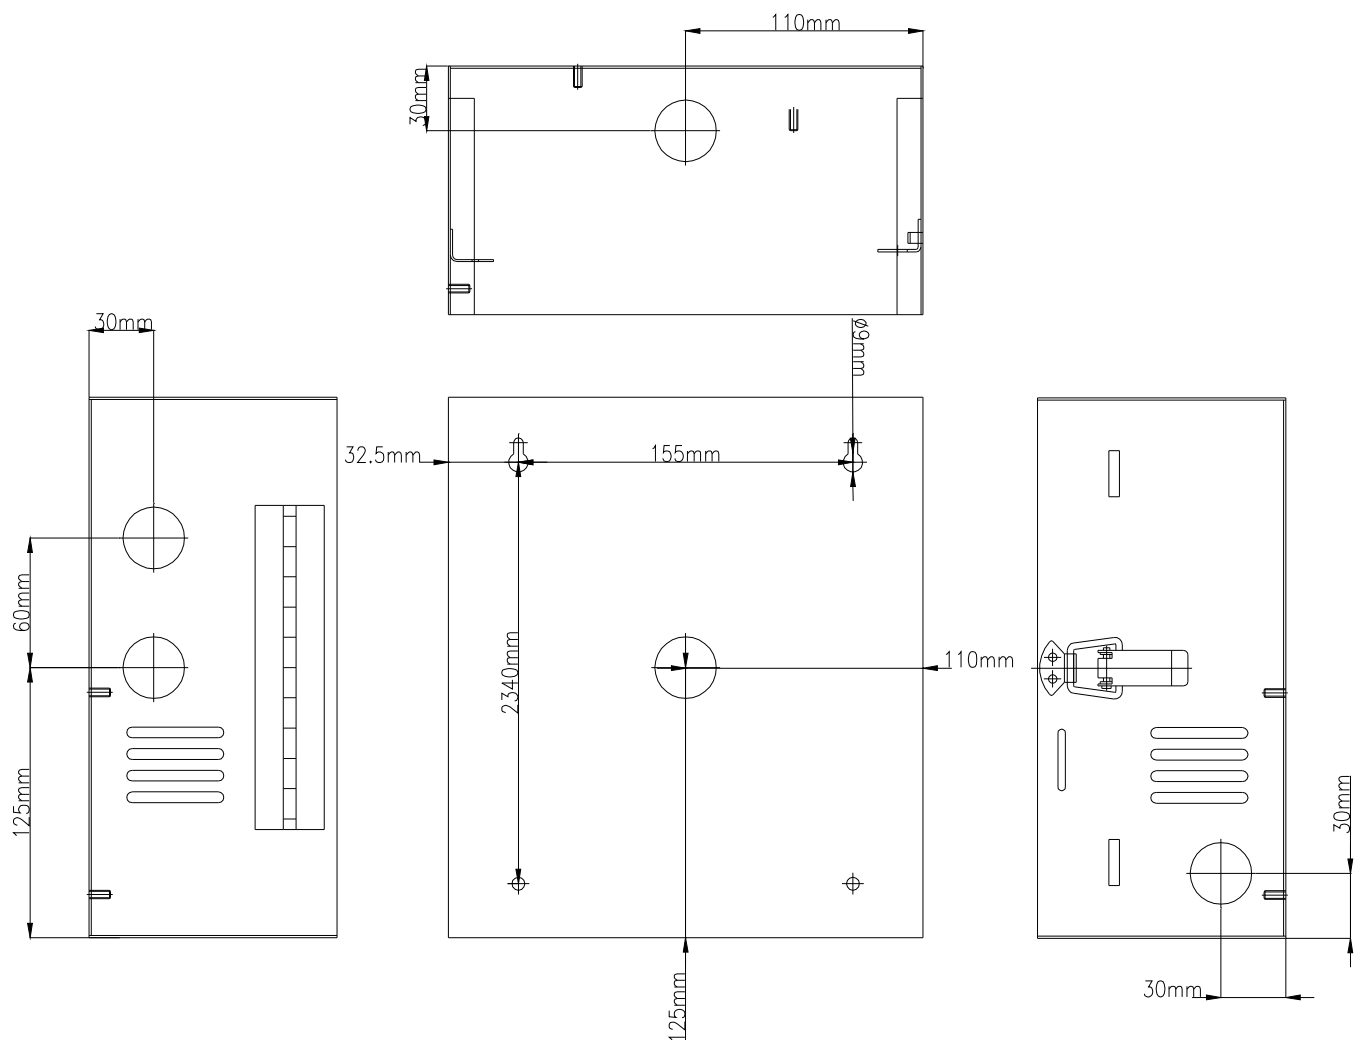

Appendix list:

Item	Description	Dimension	Volume	Memo
1	Instruction Sheet	A4	1	
2	Wire	18AWG 28cm	1	Black
3	Wire	18AWG 28cm	1	White
4	Wire	18AWG 28cm	1	Blue
5	Wire	18AWG 28cm	1	Yellow
6	AC CORE	180cm	1	
7	Linear Transformer	110VAC/24VAC, 100VA	1	

P3 is not responsible for any typographical errors. Product specifications are subject to change without notice.



3139 MacArthur Blvd Northbrook IL 60062 Ph: 877-478-4733 Fax 847-205-1113 www.pthree.com